


rush
PRODUCTIONS LLP





Indoor LC2.5P

**FULL COLOUR LED
SMD MODULES**

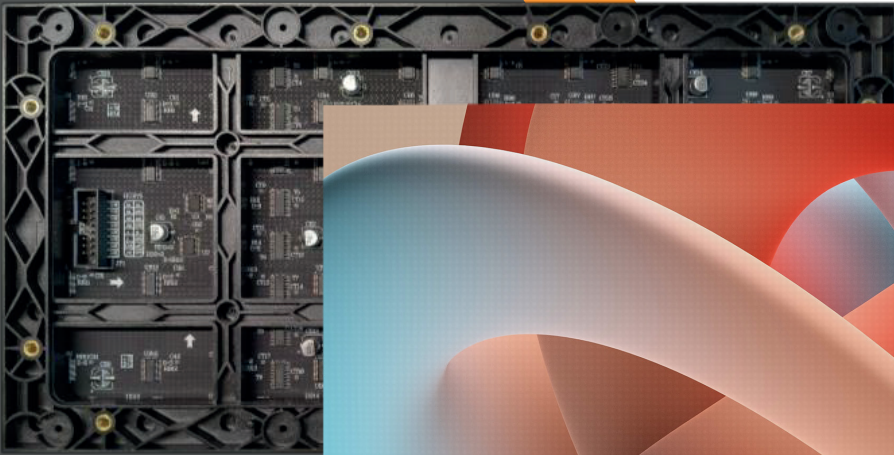


LAMPRO
A Unilumin Group Company

Product Picture of Indoor LC2.5P Series

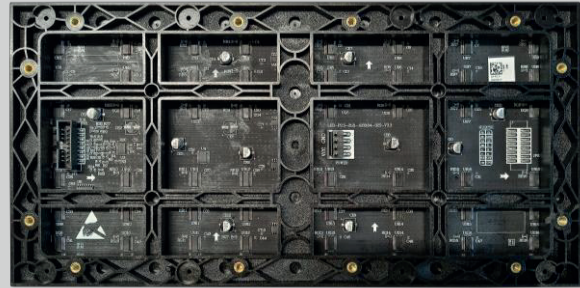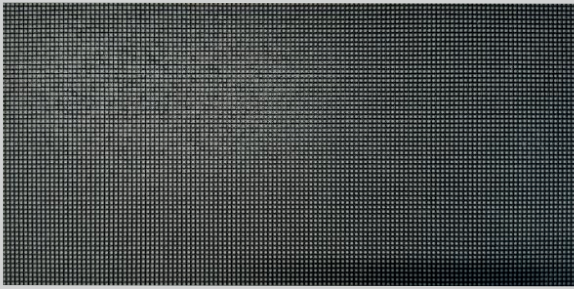

Note: The picture is for reference only, the specific object shall prevail.

Hole Position of Indoor LC2.5P Series

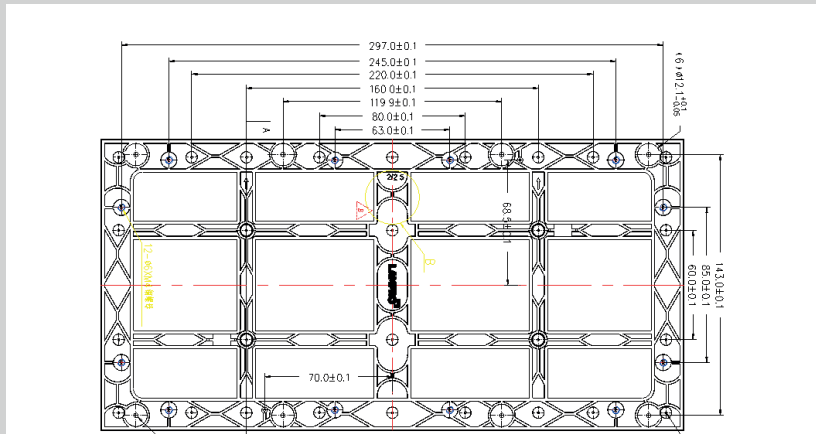

Note: Drawings are for reference only.

BEST PRICE

₹1350

1920Hz

BEST PRICE

₹1525

3840Hz

SPECIFICATION (INDOOR)

	Parameter Name	P2.5
Module	LED Type	SMD2121
	Pixel Pitch	2.5mm
	Module Resolution(WxH)	128X64=8192 Pixels
	HUB	HUB75
	Module Dimension	320mm×160mm×16.6mm
	Module Weight	0.46±0.02kg
Optical	Single-dot Brightnes Calibration	Support
	White Balance Brightness	≥500 CD/m2
	Standard Color Temperature	6500K (1000K~9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	3000 : 1
Electronic	Input Power <Max>	488W/m2
	Input Power <Typical>	163W/m2
	Power Voltage	"AC90~132V/AC186~264V, Frequency 47-63(Hz)"
Performance	Frame Changing Frequency	≥60Hz
	Drive Mode	Constant Current Drive/32 Scan
	Refresh Rate	≥1920Hz / ≥3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	50000H
	Working Temperature/Humidity Range (°C/RH)	-20°C~50°C / 10~65RH (No Condensation)
	Storage Temperature/Humidity Range (°C/RH)	-10°C~30°C / 10~60RH (No Condensation)